



Description

IPICO's Dual Frequency RFID Technology uses the same IP-X multi-read protocol as its UHF products, but the low frequencies used, (125kHz power-up and 6.8MHz return signal), can penetrate through "lossy" media without the problems of tag antenna detuning, and the high attenuation encountered with UHF systems. Because of the high tag transmit carrier frequency, high data rates are achievable (up to 256kbit/sec), resulting in fast reading of multiple tags in the beam. Dual Frequency technology allows for longer ranges to be achieved than single frequency low frequency technologies, e.g. 125 kHz or 13.56 MHz. This is mainly because the tag data carrier frequency (6.8 MHz) is much higher than the power-up frequency (125 kHz). The DF Small Linear tag can operate when affixed to thin metal surfaces.

Applications

- § Short range applications, e.g. access control and asset control
- § Tracking of instruments
- § Tracking of mine Self Contained Self Rescue packs
- § Tracking of foodstuffs, in bins or bags
- § Mining tracers (ore, diamonds)
- § Electronic labelling of RF-unfriendly materials (rock samples, trees, etc)
- § Any situation where the tag needs to be embedded in, or affixed to a lossy material, even marine applications

Chipset

- § X3 / EM4322

Tag Construction

- § Consists of a chip module attached to 125 kHz and 6.8 MHz coil antennas, potted into a 4 mm thick PVC housing.



Small Linear Tag – 45 x 15 x 4 mm, suitable for mounting on thin metal surfaces

Key Features

- § Low cost single chip solution
- § Compliant with USA, European, Australian, and RSA spectrum allocations
- § Dual frequency (Transmit 125kHz / Receive 6.8MHz)
- § Robust Anti-collision protocol (up to 120 tags read simultaneously)
- § Fast moving tags (8 m/sec) can reliably be read
- § Can be used in mixed populations of Read/Write and Read-Only Dual Frequency IP-X RFID tags
- § Factory programmed 64 bit ID number
- § High tag transmission rate (128 kbits/sec)
- § High tag read rate – up to 155 tags/sec
- § Passive – no battery
- § -30 to +70 °C operating temperature range
- § Adhesively mounted to surface.
- § Waterproof
- § Can be mounted on thin metal surface
- § Solid and robust.

Multi-Read Performance (Tag numbers & Tag Speed)

Speed version	Data Rate	Maximum Interval	Speed	No of tags readable
V39	128 kbit/sec	64 kbit	8 m/sec	8
			2 m/sec	35

Maximum speed is not limited by the protocol, but by the start-up time (30 – 100 msec) typical of low carrier frequency tags

Group

IPICO INC

Ontario, Canada
tel: +1 905 631 6310
fax: +1 905 631 6614
info.can@ipico.com
www.ipico.com

Operations

South Africa

Pretoria
tel: +27 12 345 9520
fax: +27 12 345 5834
info.sa@ipico.com

Australasia

Clontarf, Queensland
tel: +61 7 3889 5799
fax: +61 7 3889 5980
info.aus@ipico.com

North Asia

Shanghai, China
tel: +86 21 5080 0345
fax: +86 21 5027 8271
info.cn@ipico.com

China

Beijing, China
tel: +86 10 8280 0541
fax: +86 21 8280 0546
info.cn@ipico.com

Europe



Valence, France
tel: +33 475 443 238
fax: +33 475 443 238
info.europe@ipico.com

USA

Georgia, USA
tel: +1 770 552 9654
fax: +1 404 601 9679
info.usa@ipico.com

Specifications

Device Name	Dual Frequency Tags: Small LinearType	
Part Numbers	IP-X X3-V39-sL45x15x4	
Power requirements	Passive No batteries (inductive coupling at 125 kHz, which is received and rectified to generate a supply voltage for the chip)	
Read Range ("Medium Range" Reader)	300 mm in free space (from "Master")	
Data rate	128 kbit/s	
Moving Tags, readability	10 tags @ 8m/sec; 35 tags @ 2 m/sec	Simulated
Multi-Read rate	20 tags in beam: 90 tags/sec; 100 tags in beam, 55 tags/sec	
Protocol Saturation	Time to read 20 tags = 0.2 sec; time to read 100 tags = 1.8 sec	
ID Length	64 bits (16 bit CRC)	
Antenna	Air wound (125kHz and 6.8MHz coil)	
Programmability	Read-only, factory programmed ID, 64 bits	
Physical	45 x 15 x 4.0 mm, 4.6 g	
Environmental	Operating temperature range: -30 to +70C Storage temperature range: -40 to +85C Humidity: up to 100% IP rating: IP 68 UV resistant: Yes	

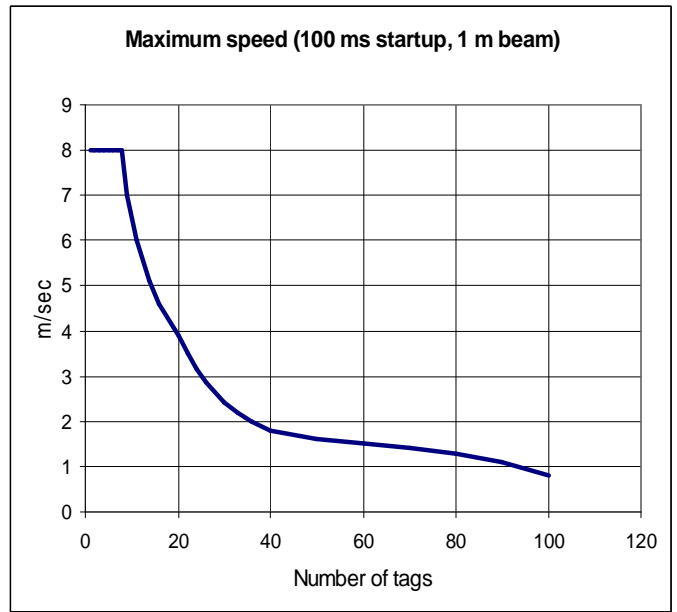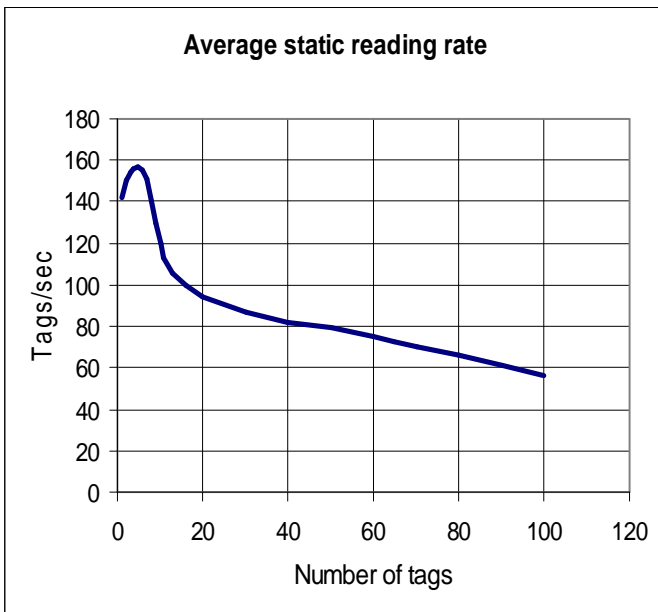

Ordering Information

Product Name	Product Code	Description
X3 DF tag, Small Linear	IP3312	IP-X X3-V39-sL45x15x4